


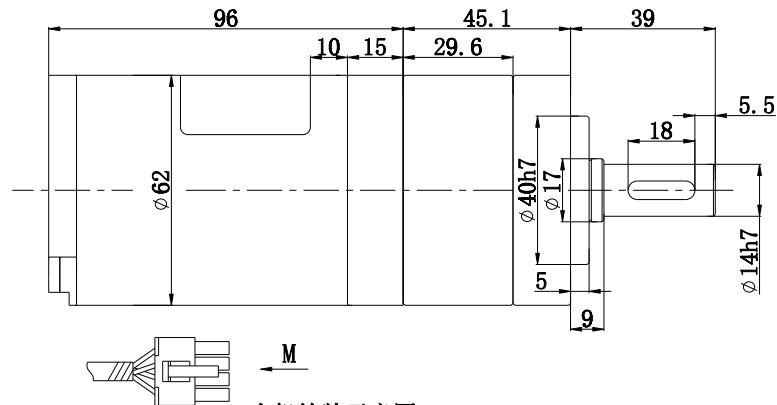

62BLDPN2460-30S	
DC MOTOR	
80W 24VDC 3000RPM IP20	
4A Class B Cont P=3	
Date: *****	
50	

62PN	23
GEAR HEAD	
45	

A diagram showing a 3x4 grid of squares. Above the grid, a horizontal line is drawn, and a vertical line extends from the center of the grid to a point above the horizontal line. The text "3:1" is written above the horizontal line. The grid contains the following numbers:

1	3	5	7
2	4	6	8

1	2	3	4	5	6	7	8
U	V	W	GND	Hv	Hw	Hu	Vcc
黄(粗)	绿(粗)	蓝(粗)	黑(细)	绿(细)	蓝(细)	黄(细)	红(细)

型 号	62BLDPN2460-30S	防护等级	IP20
额定电压	24VDC	使用环境温度	-40° C~+60° C
额定功率	60W	减速器参数	
额定电流	4A±10%	齿轮箱规格	62PN3. 65~8. 63
额定转速	3000rpm±10%	减速比	3. 65~8. 63:1
额定力矩	0. 191N. m	减速级数	1
空载电流	≤1. 5A	传动效率	90%
空载转速	3900rpm±10%	齿轮轴与电机轴旋向	相同
工作制	S1	齿轮箱结构	一体式
绝缘电阻	>20M Ω	整机额定扭矩	0. 627~1. 48N. m
寿 命	>5000h	减速器额定扭矩	8N. m
电气强度	相线660V/S	瞬间允许最大扭矩	2倍减速器额定扭矩
绝缘等级	B	噪 音	<60dB (A) L=40cm

3:1

整机外形图